


THIS DRAWING IS THE PROPERTY  
OF SAFEGUARD AND MUST  
NOT BE LOANED OR COPIED  
WITHOUT WRITTEN CONSENT

© 2008 SAFEGUARD EUROPE LTD

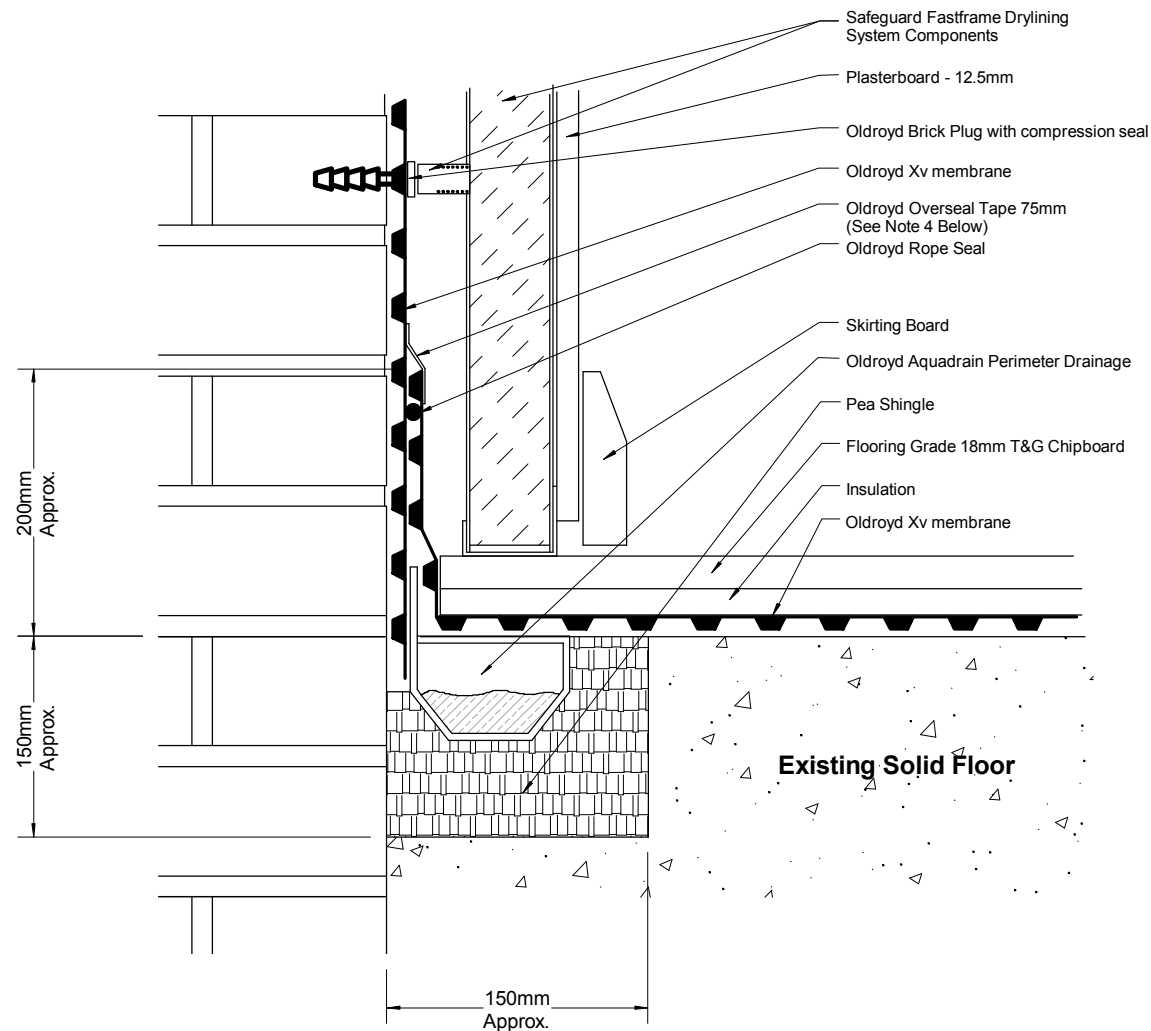

- NOTES:**
1. All SAFEGUARD CAD drawings show typical applications and our Technical Department should be consulted before they are used for specification purposes.
  2. Product applicators should refer to the manufacturer's application/installation guidelines.
  3. The load of the Fastframe drylining system should be carried by the wall NOT the floor.
  4. It is important that the internal environment is controlled to prevent the possibility of condensation forming on the face of the wall membrane and causing problems.
  5. It is important that provision is made for the removal of ground gases from underneath the membrane.

System Drg.  
Nos:

XV-AQ-001(6).tcw (TurboCAD)  
XV-AQ-001(6).dwg (Autocad)  
XV-AQ-001(6).pdf (Acrobat)

CONTRACT No:

DRAWN JDF, CBS

DATE 28th February 2005

SCALE (A3) Not To Scale

CHECKED

APPROVED

CLIENT:-

Safeguard Europe Ltd

TITLE:

Perimeter Aquadrain With  
Oldroyd Xv Used on Wall  
& Floor - Sealed  
(Radon Protection)

**SAFEGUARD**  
MAKING BUILDINGS DRY

DRG. No.  
XV-AQ-001

REV  
6

MOD. BY	DATE	CHK. BY	APP. BY	MOD. BY	DATE	CHK. BY	APP. BY	MOD. BY	DATE	CHK. BY	APP. BY
JDF,CBS	12/02/08			JDF,CBS	10/04/08						

Safeguard Europe Ltd, Redkiln Close, Redkiln Way, Horsham, West Sussex, RH13 5QL Tel: 01403 210204 Fax: 01403 217529 www.safeguardeurope.com